UTILITY PATENT APPLICATION TRANSMITTAL

First Named Inventor or Application Identifier:

1614.1003

Attorney Docket No.

Kota ARIYAMA

(Qnly for new nonprovisional applications under 37 CFR 1.53(b))

Express Mail Label No.

75 U.S. P 9/421005

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO: Assistant Commissioner for Patents

Box Patent Application Washington, DC 20231

- 1. [X] Fee Transmittal Form
- 2. [X] Specification, Claims & Abstract [Total Pages: 19]
- 3. [X] Drawing(s) (35 USC 113) [Total Sheets: 7]
- 4. [X] Oath or Declaration [Total Pages: 3]
 - a. [X] Newly executed (original or copy)
 - . [] Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed)
 - . [] DELETION OF INVENTOR(S)

Signed statement attached deleting inventor(s) named in the prior application,

see 37 CFR 1.63(d)(2) and 1.33(b).

5. [] Incorporation by Reference (usable if Box 4b is checked)

The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

- 6. [] Microfiche Computer Program (Appendix)
- 7. [] Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
 - a. [] Computer Readable Copy
 - b. [] Paper Copy (identical to computer copy)
 - c. [] Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

- 8. [X] Assignment Papers (cover sheet & document(s))
- 9. [] 37 CFR 3.73(b) Statement (when there is an assignee) [] Power of Attorney
- 10. [] English Translation Document (if applicable)
- 11. [] Information Disclosure Statement (IDS)/PTO-1449[] Copies of IDS Citations
- 12. [] Preliminary Amendment
- 13. [X] Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
- 14. [] Small Entity Statement(s) [] Statement filed in prior application, status still proper and desired.
- 15. [X] Certified Copy of Priority Document(s) (if foreign priority is claimed)
- 16. [] Other:
- 17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:
 - [] Continuation [] Divisional [] Continuation-in-part (CIP) of prior application No: ___/____

18. CORRESPONDENCE ADDRESS

STAAS & HALSEY LLP Attn: H. J. Staas 700 Eleventh Street, N.W., Suite 500

Telephone: (202) 434-1500 Facsimile: (202) 434-1501

Washington, DC 20001

© 1997 Staas & Halsey LLP

C

W

PTO

SPECIFICATION

TO ALL WHOM IT MAY CONCERN:

BE IT KNOWN THAT I, Kota Ariyama, a citizen of Japan residing at Kawasaki-shi, Kanagawa, Japan have invented certain new and useful improvements in

INFORMATION PROCESSING APPARATUS, INFORMATION PROCESSING METHOD AND COMPUTER READABLE MEDIUM

of which the following is a specification : -

TITLE OF THE INVENTION

INFORMATION PROCESSING APPARATUS,
INFORMATION PROCESSING METHOD AND COMPUTER READABLE
MEDIUM

5

10

15

20

25

30

35

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention generally relates to an information processing apparatus, an information processing method and a computer readable medium, and more particularly to an information processing apparatus, an information processing method, and a computer readable medium for operating, by a client apparatus, an apparatus to be operated which apparatus is managed by a server apparatus.

There is a system in which a peripheral apparatus such as a printer and the like is operated from a remote computer via a network. Recently, since the period of improvement of the peripheral apparatus is becoming shorter, frequency for removing or adding the peripheral apparatus to the system is increasing. Therefore, a configuration in which adding or removing an apparatus is easily carried out is needed for the system.

2. Description of the Related Art
Fig.1 is a diagram for explaining an
example of a conventional information processing
system 1. The conventional information processing
system 1 is configured such that a client computer 2
is connected to a server computer 4 and printers 5,
6 through a network 3.

The client computer 2 operates the server computer 4 and the printers 5, 6 by sending commands to each of the server computer 4 and the printers 5, 6. As shown in Fig.1, the commands are sent directly to the server computer 4 and the printers 5, 6 through the network 3 from the client computer 2.

10

15

20

25

Therefore, the client computer 2 needs to have a command list for operating the server computer 4 and a command list for operating the printers 5, 6 separately when the server computer 4 and the printers 5, 6 are operated by different commands.

Fig. 2 is a diagram for explaining another example of a conventional information processing system 7. In Fig. 2, the same components have the same symbols as shown in Fig. 1, and descriptions of the components will be omitted.

The information processing system 7 shown in Fig.2 is configured such that a client terminal 9 for example, other than the client computer 2, can operate the server computer 4 and the printers 5, 6 through a wireless line 8.

In this case, the client terminal 9 needs to have command lists for operating the server computer 4 and the printers 5, 6 in the same way as the client computer 4. Further, each of the server computer 4 and the printers 5, 6 needs to have a wireless communication device since the wireless line 8 is used for sending commands from the client terminal 9 to the server computer 4 and the printers 5, 6.

However, according to the information processing systems 1, 7, since the command lists for the server computer 4 and the printers 5, 6 are necessary for operating the server computer 4 and the printer 5, 6 from the client computer 2 and the client terminal 9, the command lists in the client computer 2 and the client terminal 9 should be updated in the case of, for example, losing compatibility between versions of commands after updating the server computer 4 and the printers 5, 6, and in the case of operating a new device. There is a problem that updating the command lists of the

20

30

client computer 2 and the client terminal 9 takes time and effort.

Further, when the client terminal 9 which uses a communication type different from that of the client computer 2 is connected, as shown in Fig.2, each apparatus to be operated needs to have a communication device for communicating with the client computer 2 and a communication device for communicating with the client terminal 9. Therefore the configurations of the apparatuses to be operated such as the server computer 4, the printers 5, 6, and the like become complicated.

SUMMARY OF THE INVENTION

It is an object of the present invention to provide an information processing apparatus, information processing method and computer readable medium which can easily support different communication types.

The above object of the present invention is achieved by an information processing apparatus to which an operating apparatus and an apparatus to be operated by the operating apparatus are connected, the information processing apparatus including:

an instruction information storing part which stores instruction information for the apparatus to be operated; and

an instruction information send part which reads the instruction information from the instruction information storing part in response to a request from the operating apparatus and sends the instruction information to the operating apparatus.

According to the above-mentioned invention, the information processing apparatus such as a server computer stores instruction information of an apparatus to be operated such as a command list and sends the instruction information to the operating

apparatus according to a request from the operating apparatus. Therefore, the operating apparatus does not need to store the command list of the apparatus to be operated. Since the information processing apparatus manages the command lists, an apparatus to be operated can be added only by adding a command list to the information processing apparatus. Thus, it becomes easy to add and update an apparatus to be operated.

10

15

25

35

5

BRIEF DESCRIPTION OF THE DRAWINGS

Other objects, features and advantages of the present invention will become more apparent from the following detailed description when read in conjunction with the accompanying drawings, in which:

Fig.1 is a diagram for explaining an example of a conventional information processing system 1;

Fig. 2 is a diagram for explaining another example of a conventional information processing system 7;

Fig. 3 is a diagram showing a system configuration according to an embodiment of the present invention;

Fig.4 is a block diagram showing a server computer according to an embodiment of the present invention;

Fig.5 and Fig.6 are flowcharts showing
operations of a client computer, a server computer
and a printer when the client computer operates the
printer;

Fig. 7 is a diagram for explaining operations when the client computer operates the printer according to an embodiment of the present invention.

35

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Fig. 3 is a diagram showing a system configuration according to an embodiment of the present invention. An information processing system 100 of the embodiment is configured such that a client computer 101, a client terminal 102 and printers 103, 104 are connected to each other through a server computer 105.

The client computer 101 and the server 10 computer 105 are connected to each other via a telephone network 106. In addition, the client terminal 102 is connected to the server computer 105 via a communication line different from that between the client computer 101 and the server computer 105, 15 which communication line is, for example, a wireless line 107. Further, the printers 103, 104 are connected to the server computer 105, for example, via networks 108, 109 in which the communication types are different from the communication type 20 between the client computer 101 and the server

computer 105, and the communication type between the client terminal 102 and the server computer 105.

The client computer 101 operates the

printers 103, 104 through the telephone line 106 and the server computer 105 by an operation which will be described later. The client terminal 102 operates the printers 103, 104 through the wireless line 107 and the server computer 105 by an operation which will be described later.

The server computer 105 operates the printers 103, 104 according to commands from the client computer 101 or the client terminal 102.

The printers 103, 104 are connected to each other via the networks 108, 109 and are operated according to commands provided by the server computer 105.

The server computer 105 will be described

in detail in the following.

Fig. 4 is a block diagram showing the server computer according to an embodiment of the present invention. The server computer 104 includes receive units 110 - 113, a central processing unit 114, a file control unit 115, a file device 116, a user interface 117, converters 118 - 121 and send units 122 - 125.

The receive unit 110 is connected to the telephone network 106 and receives a signal sent 10 from the client computer 101 through the telephone network 106. In addition, the receive unit 110 sends the signal received from the telephone network 106 to the central processing unit 114 after 15 converting the signal into data which has a predetermined format. The receive unit 111 is connected to the wireless line 107 and receives a signal sent from the client terminal 102 through the wireless line 107. In addition, the receive unit 111 sends the signal received from the wireless line 20

111 sends the signal received from the wireless line 107 to the central processing unit 114 after converting the signal into data which has a predetermined format.

The receive unit 112 is connected to the

network 108 and receives a signal sent from the
printer 103 through the network 108. In addition,
the receive unit 112 sends the signal received from
the network 108 to the central processing unit 114
after converting the signal into data which has a

predetermined format. The receive unit 113 is
connected to the network 109 and receives a signal
sent from the printer 104 through the network 109.
In addition, the receive unit 113 sends the signal
received from the network 109 to the central

processing unit 114 after converting the signal into data which has a predetermined format.

The file control unit 115 and the user

10

15

30

interface 117 are connected to the central processing unit 114. The file device 116 is connected to the file control unit 115. The file control unit 115 accesses the file device 116 according to instructions from the central processing unit 114.

The user interface 117 includes a display, a keyboard and a mouse. The user interface 117 displays outputs from the central processing unit 114 and sends requests for processing to the central processing unit 114.

The file device 116 stores command lists 116a, 116b, 116c, ... used for operating the server computer 105 and the printers 103, 104. The file device 116 reads out the command lists 116a, 116b, 116c, ... and the like according to instructions from the file control unit 115.

The converter 118 converts data processed in the central processing unit 114 such that the 20 protocol of the data becomes suitable for the client computer 101. The data converted in the converter 118 is supplied to the send unit 122. The send unit 122 supplies the data converted in the converter 118 to the client computer 101 via the telephone network 106.

The converter 119 converts data processed in the central processing unit 114 such that the protocol of the data becomes suitable for the client terminal 102. The data converted in the converter 119 is supplied to the send unit 123. The send unit 123 supplies the data converted in the converter 119 to the client terminal 102 via the wireless line 107.

The converter 120 converts data processed in the central processing unit 114 such that the protocol of the data becomes suitable for the printer 103. The data converted in the converter 120 is supplied to the send unit 124. The send unit

15

124 supplies the data converted in the converter 120 to the printer 103 via the network 108.

The converter 121 converts data processed in the central processing unit 114 such that the protocol of the data becomes suitable for the printer 104. The data converted in the converter 121 is supplied to the send unit 125. The send unit 125 supplies the data converted in the converter 121 to the printer 104 via the network 109.

In the following, operations when the client computer 101 operates the printers 103 and 104 will be described.

Fig. 5 and Fig. 6 are flowcharts showing the operations of the client computer, the server computer and the printer when the client computer operates the printer.

First, the process of the client computer 101 will be described.

When the client computer 101 receives a

20 command for operating the printer 103, the client
computer 101 sends a request for a command list or
software of the printer 103 to the server computer
105 by an e-mail in step S1-1. Then, the client
computer 101 waits for the command list or the
25 software corresponding to the request. When the
client computer 101 receives the command list or the
software from the server computer 105 in step S1-2,
it becomes possible for the client computer 101 to

When the client computer 101 receives an operating command of the printer 103 from a user, the client computer 101 generates a command on the basis of the command list provided by the server computer 105 in the step S1-2 and sends the generated command to the server computer 105 in step S1-4. Then, the client computer 101 waits for a processing result of the command from the server

operate the printer 103.

10

15

computer 105. The operation of the client computer 101 for operating the printer 103 is completed when receiving the processing result of the printer 103 is received from the server computer 105 in step S1-5.

Next, the process of the server computer 105 will be described.

When the server computer 105 receives the request for the command list and the like from the client computer 101 in step S2-1, the server computer 105 determines whether the request is for the server computer 105 in step S2-2.

When the request is determined to be for the server computer 105 in step S2-2, the request is analyzed in step S2-3.

After analyzing the request, the server computer 105 determines whether the command list or the like corresponding to the request exists in the file device 116 in step S2-4.

When it is determined that the command list or the software corresponding to the request from the client computer 101 does not exist in the file device 116 in step S2-4, the server computer sends a request for the command list to the printer 103 in step S2-5. The server computer 105 stores

103 in step S2-5. The server computer 105 stores the command list after receiving the command list from the printer 103 in step S2-6, and sends the command list to the client computer 101 in step S2-7.

Next, when the server computer 105
receives a command generated on the basis of the command list of the printer 103 from the client computer 101 in step S2-8, the server computer 105 determines whether the command is for the server computer 105 in step 2-9.

When it is determined that the command is for the printer 103 in step S2-9, the server computer 105 sends the command provided from the

10

25

client computer 101 to the printer 103 in step S2-10. When the server computer 105 receives a processing result corresponding to the command sent in step S2-10 from the printer 103 in step S2-11, the server computer 105 determines whether the result is for the server computer 105 in step S2-12.

When it is determined that the result is for the server computer 105 in step S2-12, the server computer 105 stores the result in the file device 116.

When it is determined that the result is not for the server computer 105, the server computer 105 sends the result to the client computer 101 in step S2-13.

When it is determined that the command is for the server computer 105 in step S2-9, the server computer carries out a process corresponding to the command in step S2-14. Then, the server computer 105 sends the processing result to the client computer 101 in step S2-13.

In addition, when it is determined that the request is not for the server computer 105 in step S2-2, the server computer 105 sends the request to a destination of the request and completes processing in step S2-14.

In the following, the process of the printer 103 will be described.

When the printer 103 receives a request for the command list from the server computer 105 in step S3-1, the printer analyzes the request in step S3-2 and sends the command list, which is stored in the printer 103 beforehand, to the server computer 105 in step S3-3.

When the printer 103 receives the command 35 for the printer 103 from the server computer 105 in step S3-4, the printer 103 carries out processing corresponding to the command in step S3-5 and sends

30

35

the processing result to the server computer 105 in step S3-6.

In the following, operations when the client computer 101 operates the printer 103 will be described with reference to Fig.7.

Fig.7 is a diagram for explaining the operations when the client computer 101 operates the printer 103 according to an embodiment of the present invention.

For example, when the client computer 101 receives a command for operating the printer 103, the client computer 101 sends a request for a command list or software of the printer 103 to the server computer 105 by an e-mail in step S4-1.

15 When the server computer 105 receives the e-mail from the client computer 101 in step S4-1, the server computer 105 analyzes the request in the e-mail received by the central processing unit 114 in step S4-2. When the central processing unit 114 20 recognizes that the request is a request for the command list of the printer 103 according to the analysis in step S4-2, the central processing unit 114 makes a request of the file control unit 115 to read the command list 116b of the printer 103 from 25 the file device 116. The file control unit 115 reads the command list 116b of the printer 103 from the file device 116 according to the request from the central processing unit 114, and provides the command list to the central processing unit 114.

When the central processing unit 114 obtains the command list 116b of the printer 103 from the file control unit 115, the central processing unit 114 supplies the command list 116b of the printer 103 to the converter 118. The converter 118 converts the command list 116b of the printer 103 such that the protocol of the command list 116b becomes suitable for the client computer

10

15

101, and sends the command list 116b to the send unit 122.

The send unit 122 sends the converted command list 116b to the client computer 101 in step \$4-3.

When the client computer 101 receives the command list 116b of the printer 103 from the server computer 105 in step S4-3, the client computer 101 generates a command corresponding to an operation which the printer should be instructed to perform from the command list 116b and sends the command as an e-mail to the server computer 105 in step S4-4.

When the server computer 105 receives the e-mail sent from the client computer 101, the server computer 105 analyzes the command and supplies it to the converter 120 as the command to the printer 103. The converter 120 converts the command such that the protocol of the command becomes suitable for the printer 103 in step S4-5.

20 The command converted in the converter 120 is supplied to the send unit 124. The send unit 124 supplies the command to the printer 103 via the network 108 in step S4-6.

When the printer 103 receives the command sent from the server computer 105 in step S4-6, the printer 103 carries out a process corresponding to the received command and provides the processing result to the server computer 105 in step S4-7.

When the server computer 105 receives the processing result sent from the printer 103 in step S4-7, the server computer 105 supplies the processing result to the converter 118. The converter 118 converts the processing result from the printer 103 such that the protocol of the result becomes suitable for the client computer 101 in step S4-8.

The processing result which is converted

30

in the converter 118 is supplied to the send unit 122. The send unit 122 sends the converted result to the client computer 101 via the telephone network 106 in step S4-9.

According to the above-mentioned process, the client computer 101 can obtain the processing result corresponding to the command for operating the printer 103 from the printer 103.

invention, the client computer 101 or the client terminal 102 operates the printer 103 or 104 via the server computer 105. Therefore, even when communication types of the client computer 101, the client terminal 102 and the printers 103 and 104 are different, the client computer 101, the client terminal 102 and the printers 103 and 104 can be connected only by configuring the server computer 105 such that the server computer 105 supports the communication types. That is, the system can

20 support various communication types easily.

In addition, since the server computer 105 stores command lists and/or software of the printers 103, 104 which are connected, the client computer 101 can operate the printers 103, 104 by supplying the command lists or the software to the client computer 101 as necessary from the server computer Therefore, the client computer 101 or the client terminal 102 does not need to store the command lists or the software. Thus, when an apparatus is added, the apparatus can be connected only by adding a command list or software for the added apparatus to the file device 116 in the server computer 105. Therefore, it becomes easy to add command lists and software.

In addition, even when the command list or the software of the added apparatus does not exist in the file device 116, it is easy to supply the

10

15

20

30

35

command list or the software to the server computer 105 by storing the command list or the software in storage units 103a, 104a of the printers 103, 104.

In the embodiment, the operations when the client computer 101 operates the printer 103 were described. The present invention can be applicable to the cases when the client computer 101 operates the printer 104 and when the client terminal 102 operates the printers 103, 104 and the like.

In addition, in the embodiment, a configuration in which the client computer 101 and the client terminal 102 operate the printers and the like was described. However, the present invention can be applicable to other apparatuses. Moreover, the communication types are not limited to the telephone network 106 and the wireless line 107. For example, a network which has a firewall can be used. The above-mentioned server computer can be applicable to such a network only by supporting protocols, such as e-mail, ftp, http and the like, which pass through the firewall.

In addition, the apparatus to be operated is not limited to the printers.

Moreover, the command can be issued as the e-mail by converting a protocol in the server computer 105. Therefore, flexibility in operation can be improved.

As mentioned above, according to the present invention, an information processing apparatus such as the server computer stores instruction information of an apparatus to be operated such as the command list and sends the instruction information of the apparatus which an operating apparatus will operate to the operating apparatus according to a request from the operating apparatus. Therefore, the operating apparatus does not need to store the command list of the apparatus

to be operated. Since the information processing apparatus manages the command lists, an apparatus to be operated can be added only by adding the command list to the information processing apparatus. Thus, it becomes easy to add and update an apparatus to be operated.

In addition, according to the present invention, when the information processing apparatus does not have instruction information corresponding to the request from the operating apparatus, the instruction information can be obtained from the apparatus to be operated. Thus, the command list is added to the information processing apparatus from the apparatus to be operated automatically according to the request from the operating apparatus. Therefore, it becomes unnecessary to add the command list to the information processing apparatus and the like.

In addition, according to the present invention, the information processing apparatus 20 accommodates difference between communication types of the operating apparatus and the apparatus to be Therefore, it becomes unnecessary to operated. unify the communication types of the information processing apparatus, the operating apparatus and 25 the apparatus to be operated, and various apparatuses which have various communication types can be added so that the flexibility is improved. Moreover, when adding an apparatus, the information 30 processing apparatus only needs to support the communication type of the added apparatus. Therefore, it becomes easy to add an apparatus.

The present invention is not limited to the specifically disclosed embodiments, and variations and modifications may be made without departing from the scope of the invention.

WHAT IS CLAIMED IS:

5

1. An information processing apparatus to which an operating apparatus and an apparatus to be operated by said operating apparatus are connected, said information processing apparatus comprising:

an instruction information storing part which stores instruction information for said apparatus to be operated; and

an instruction information send part which reads said instruction information from said instruction information storing part in response to a request from said operating apparatus and sends said instruction information to said operating apparatus.

20

15

The information processing apparatus as claimed in claim 1, further comprising an
 instruction information obtaining part which obtains said instruction information from said apparatus to be operated when said instruction information storing part does not include said instruction information corresponding to said request.

30

3. The information processing apparatus
35 as claimed in claim 1, further comprising a
communication type accommodation part which
accommodates difference between communication types

of said operating apparatus and said apparatus to be operated.

5

4. The information processing apparatus as claimed in claim 3, wherein said communication type accommodation part includes a converter which converts data such that a protocol of said data becomes suitable for said communication type.

15

10

5. The information processing apparatus as claimed in claim 1, wherein said apparatus to be operated is a printer.

20

30

35

6. An information processing method of an information processing apparatus to which an operating apparatus and an apparatus to be operated by said operating apparatus are connected, said information processing method comprising:

an instruction information request receiving step of receiving from said operating apparatus a request for instruction information for operating said apparatus to be operated; and

a sending step of sending said instruction information from said information processing apparatus to said operating apparatus in response to said request.

7. The information processing method as claimed in claim 6, wherein said sending step comprising a step of obtaining said instruction information from said apparatus to be operated when said information processing apparatus does not include said instruction information corresponding to said request.

10

20

5

8. A computer readable medium storing
15 program code for causing a computer system to
process information, an operating apparatus and an
apparatus to be operated by said operating apparatus
being connected to said computer system, said
computer readable medium comprising:

first program code means for receiving from said operating apparatus a request for instruction information for operating said apparatus to be operated; and

second program code means for sending said 25 instruction information to said operating apparatus in response to said request.

30

35

9. The computer readable medium as claimed in claim 8, wherein said second program code means comprising program code means for obtaining said instruction information from said apparatus to be operated when said computer system does not include said instruction information corresponding to said request.

ABSTRACT OF THE DISCLOSURE

An information processing apparatus is provided, to which apparatus an operating apparatus and an apparatus to be operated by the operating apparatus are connected, the information processing apparatus including an instruction information storing part and an instruction information send part. The instruction information storing part stores instruction information for the apparatus to be operated. The instruction information send part reads the instruction information from the instruction information storing part in response to a request from the operating apparatus and sends the instruction information to the operating apparatus.

15

10

5

20

FIG. 1 PRIOR ART


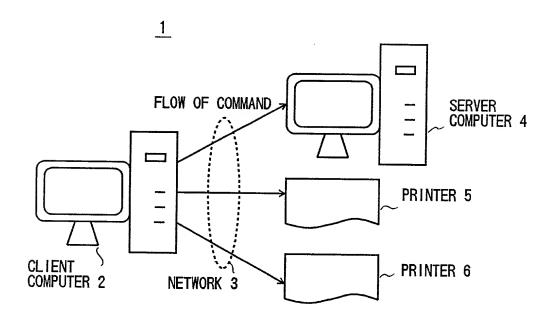


FIG. 2 PRIOR ART

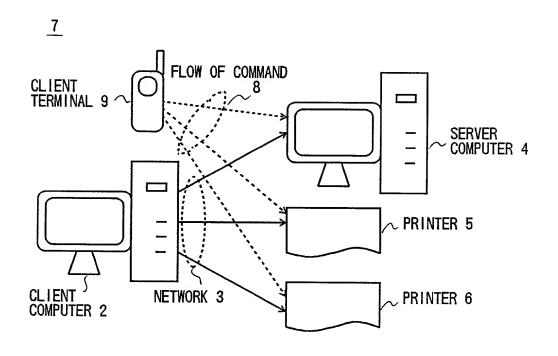

F | G. 3


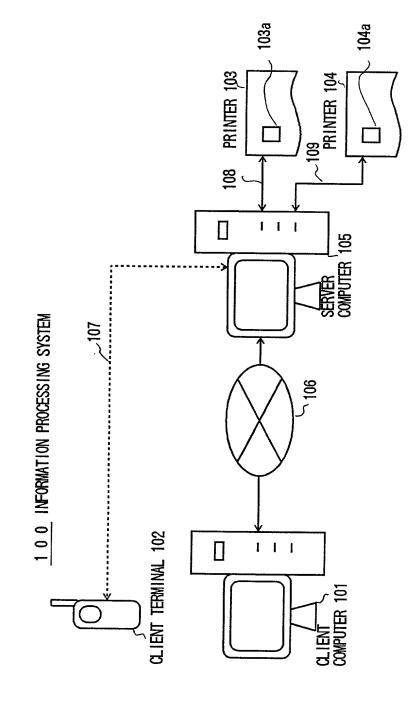


FIG. 4

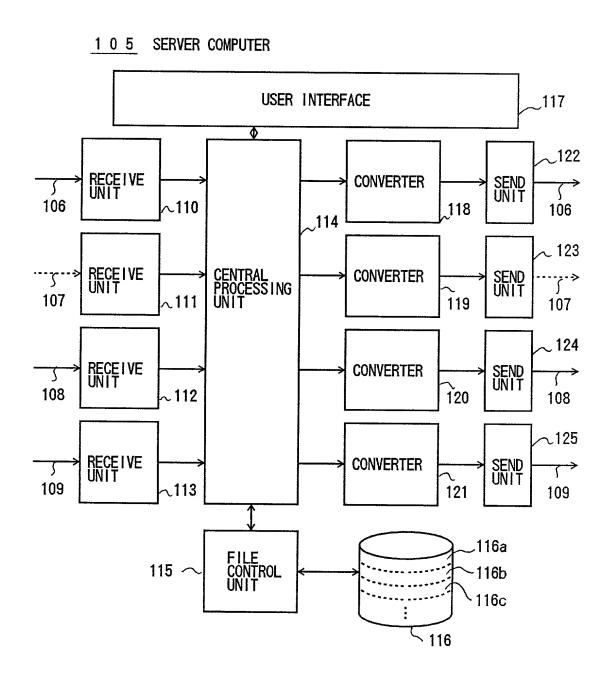

F I G. 5



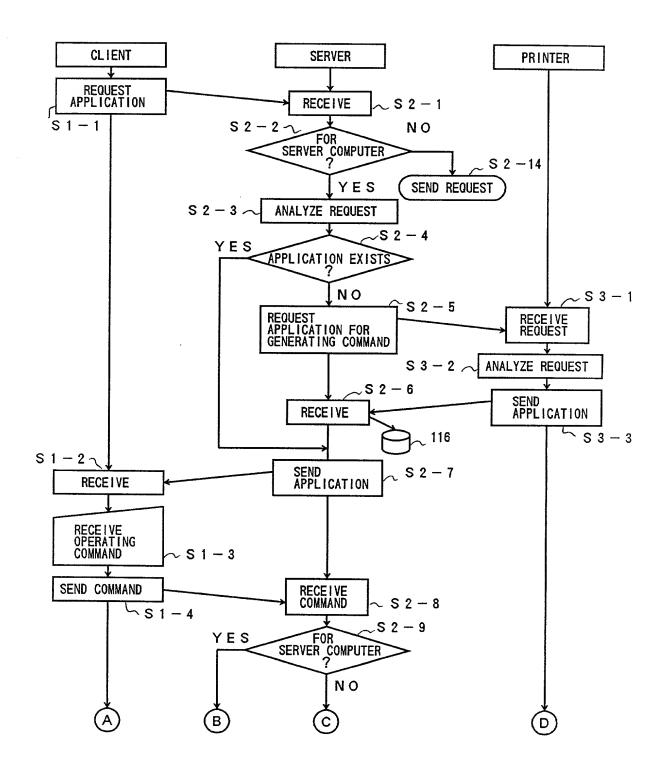


FIG. 6

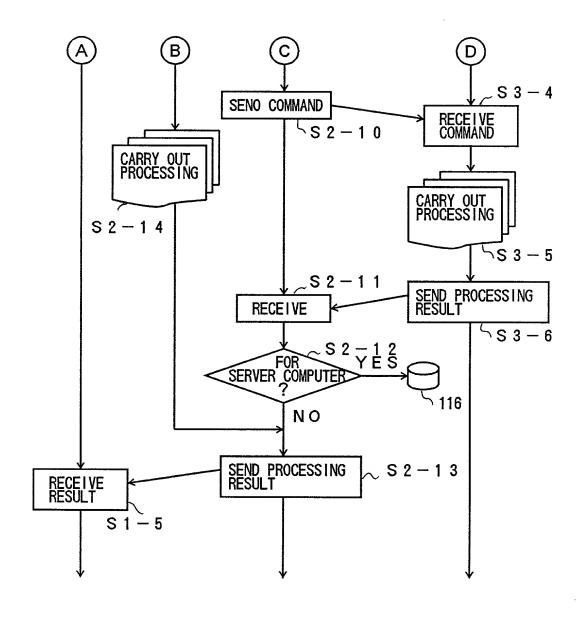

F I G. 7

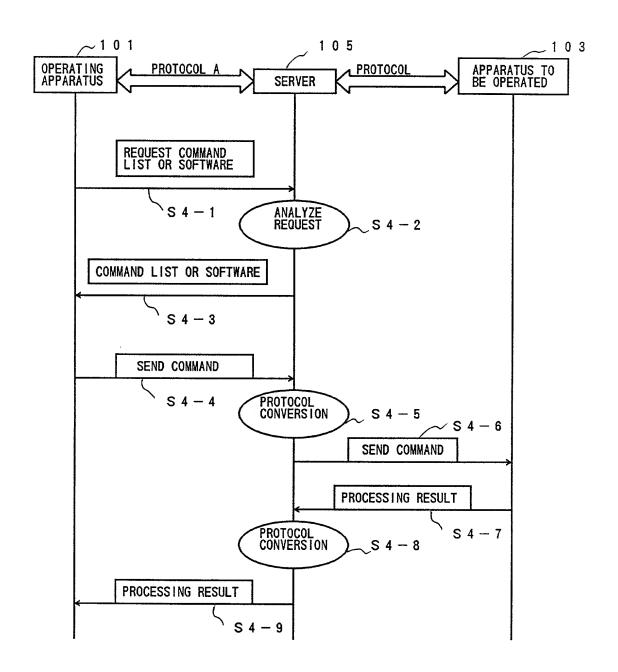

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

「下 ¹¹ の氏名の発明者として、私は以下の通り宣言します。	As a below named inventor, I hereby decla: "hat:
私の住所、私書篇、国籍は下記の私の氏名の後に記載され た通りです。	My residence, post office address and citizenship are as stated next to my name.
下記の名称の発明に関して請求範囲に記載され、特許出顧している発明内容について、私が最初かつ唯一の発明者(下記の氏名が一つの場合)もしくは最初かつ共同発明者であると(下記の名称が複数の場合)信じています。	I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled
· ·	INFORMATION PROCESSING APPARATUS,
	INFORMATION PROCESSING METHOD AND COMPUTER READABLE MEDIUM
上記発明の明細書(下記の欄でx目がついていない場合は、本書に添付)は、	the specification of which is attached hereto unless the following box is checked:
	box is checked: was filed on as United States Application Number or PCT International Application Number
本書に系付)は、	box is checked: was filed on as United States Application Number or
本書に系付)は、	box is checked: was filed on as United States Application Number or PCT International Application Number and was amended on

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid CMB control number.

Japanese Language Declaration (日本語宣言書)

私は、米国出典第35福119条(a)-(d) 領又は365条(b) 和に基金下記の、米国以外の国の少なくとも一コ国を指定している行評協力条約365(a) 領に基ずく国際出願、又は外国での行評出願もしくは発明を証の出顧についての外国優先権をここに出張するとともに、優先権を主張している。本出顧の前に出願された行評または発明者証の外国出願を以下に、存れをマークすることで、示しています。

Prior Foreign Application(s)

外国での先行出版
Pat. AppIn. No.10-307278 Japan

(Number) (Country)
(番号) (図名)

(Number) (Country)
(番号) (図名)

利 1. 第35編米国田共119条(e)項に基いて下記の米 国行針出頼規定に記載された権利をここに主張いたします。

> (Application No.) (Filing Date) (出顧공국) (出顧日)

私は、下記の米国伝典第35編120条に基いて下記の米国特許出順に記載された権利、又は米国を指定している特許協力条約365条(c)に基ずく権利をここに主張します。また、本出順の各籍求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国特許出顧に開示されていない限り、その先行米国出顧香提出日以降で本出顧香の日本国内生たは特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.) (Filing Date) (出類日)

(Application No.) (Filing Date) (出類日)

私は、私自身の知識に基ずいて本宣言書中で利が行なう表明が真実であり、かつ私の入手した情報と私の信じるところに基づく表明が全て真実であると信じていること。さらに故意になられた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること。そしてそのような故様による或偽の声明を行なえば、出籍した。又は既に許可された特許の有効性が失われることを認識し、よってここによ記のごとく直署を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed 優先撤出受なし

28/October/1998

(Day/Month/Year Filed)
(出版年月日)

(Day/Month/Year Filed)
(出版年月日)

I hereby claim the benefit under Title 35. United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.) (Filing Date) (出類音)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Status: Patented, Pending, Abandoned) (契以: 特許許可済、孫漢中、故受済)

(Status: Patented, Pending, Abandoned) (現況: 特許許可济、乐溪中、故溪济)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration

(日本語宣言書)

委任状: 私は下記の発明者として、本出頭に関する一切の 手続きを米特許商標局に対して遂行する弁理上または代理人 として、下記の者を指名いたします。(弁護士、または代理 「氏名及び登録番号を明記のこと) POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number)

James D. Halsey, Jr., 22,729; Harry John Staas, 22,010; David M. Pitcher, 25,908; John C. Garvey, 28,607; J. Randall Beckers, 30,358; William F. Herbert, 31,024; Richard A. Gollhofer, 31,106; Mark J. Henry, 36,162; Gene M. Garner II, 34,172; Michael D. Stein, 37,240; Paul I. Kravetz, 35,230; Gerald P. Joyce, III, 37,648; Todd E. Marlette, 35,269; Harlan B. Williams, Jr., 34,756; George N. Stevens, 36,938; Michael C. Soldner, P-41,455 and William M. Schertler, 35,348 (agent)

查斯送付先

Send Correspondence to:

STAAS & HALSEY 700 Eleventh Street, N.W. Suite 500 Washington, D.C. 20001

	三重	===	Ŧ	#	.27	纹	4.	
;	<u>3=</u>	132	~₹	ur.	4	ж	バ.	•

(名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

STAAS & HALSEY (202) 434-1500

推一または第一発明者名		Full name of sole or first inventor				
		Kota Ariyama				
発明者の署名	H 付 ,	Inventor's signature, Date Wata Ariyama October 12, 1999				
AL所 U		Residence Kawasaki-shi, Kanagawa, Japan				
E STATE OF THE STA		Citzenship Japan				
私古和 ·		Post Office Address C/O FUJITSU LIMITED,				
		1-1, Kamikodanaka 4-chome, Nakahara-ku,				
		Kawasaki-shi, Kanagawa, 211-8588 Japan				
第二共同発明者		Full name of second joint inventor, if any				
第二共同発明者	日付	Second inventor's signature Date				
住所		Residence				
国籍		Àlizenship				
私杏蕉		Post Office Address				
<u> </u>						

(第三以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for third and subsequent joint inventors.)